




Mini DIN Connector straight "THT" Type

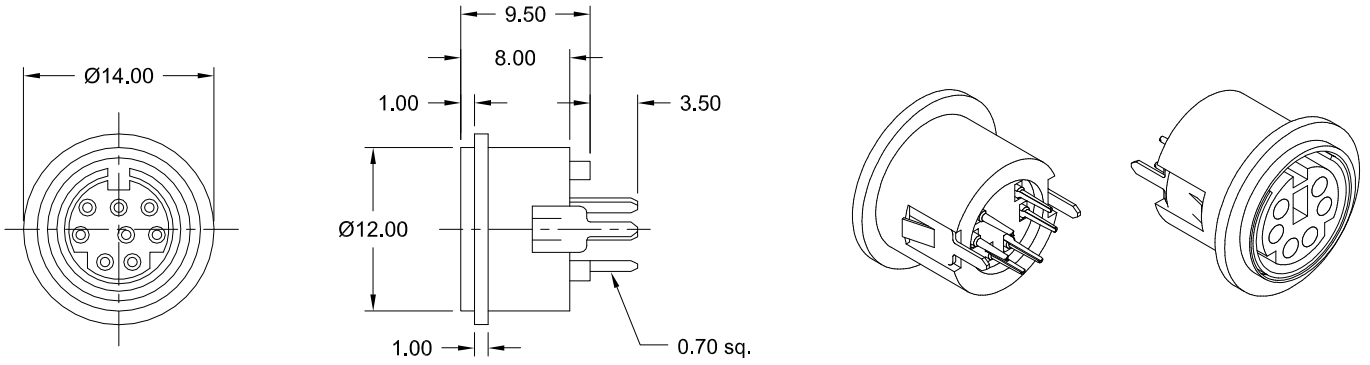


Front View

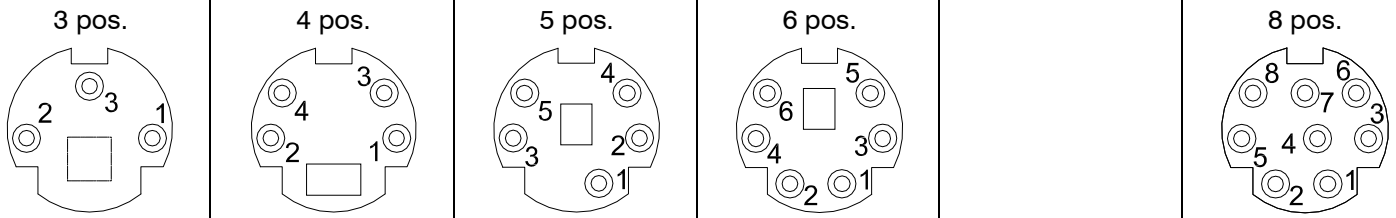


PCB through hole Layout (Top View)

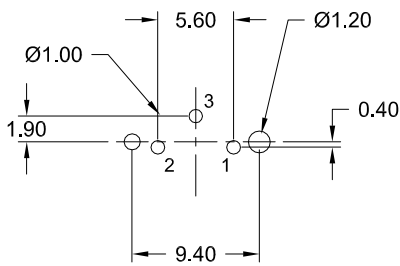


3 pos.

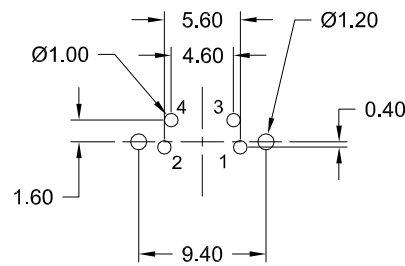


4 pos.

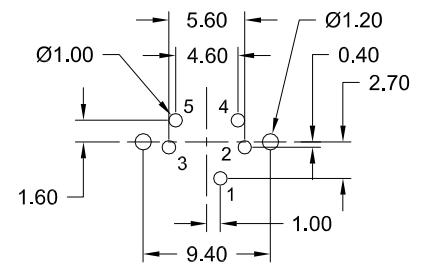

5 pos.

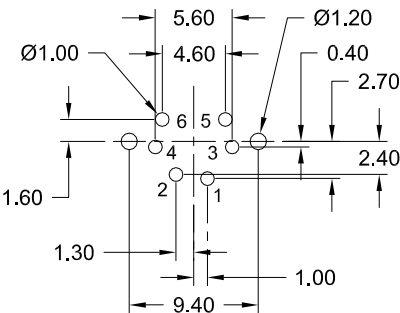

6 pos.

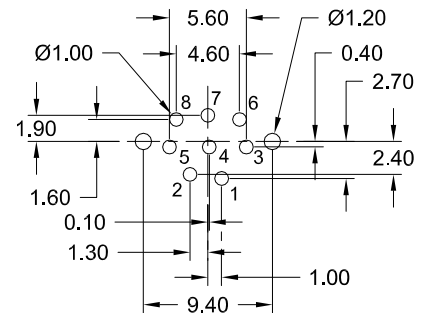

8 pos.

SPECIFICATIONS

Current rating	1 A max. at 100 V AC or 2 A max. at 12 V DC	Contact material	(RoHS compliant)	PhBz; Silver plated
Insulation resistance	100 M Ω min. at 500 V DC	Ground Terminal material	(RoHS compliant)	Brass; Tin plated
Contact resistance	30 m Ω max.	Insulator material	(RoHS compliant)	P.B.T. UL 94 V-0
Dielectric withstanding voltage	250 V AC for 1 min.	Insertion force		39N max.
Operating temperature	-40°C to +105°C	Extraction force		8,8N min.
		Insertion/extraction cycles		100 min.

Ordering Code

MDJ - xxx - SN01 - AGZ

Nbr of contacts
003; 004; 005
006; 008