


REV.	DESCRIPTION	DATE	DRAWN
A	New	28.12.2016	Cherry
B	General update	02.07.2016	Cheng



**Order Code**  
MCC-M08MA04/XxxXXxx-xxxx-00

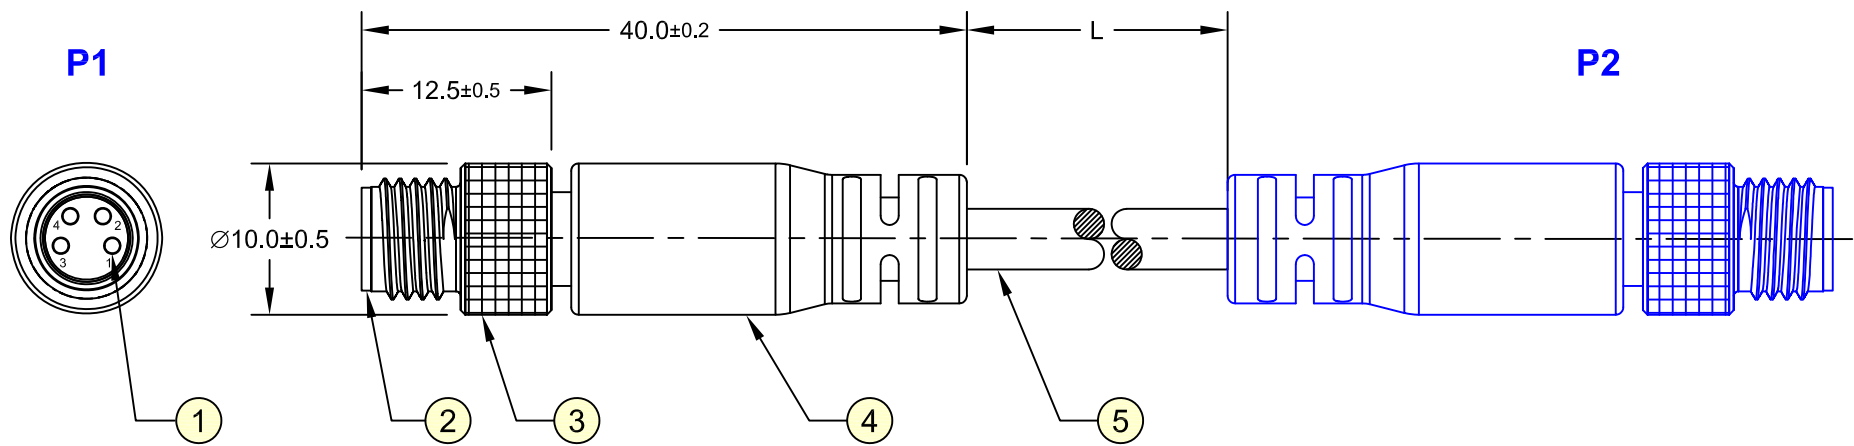

Cable Length "L"  
0001 ~ 9999cm

P2 End Type  
**0** = Loose cable end  
**M08MA04** = M08 4-pin male A-Coding  
**M08FA04** = M08 4-pin female A-Coding  
 Others on request

**Specifications**  
**Electrical**  
 Current rating: 3A per contact  
 Insulation resistance: 100MΩ min.  
 Voltage rating: 30V AC/DC  
 Withstanding voltage: 650V AC

**Mechanical Requirements**  
 Waterproof rate: IP68  
 Operating life: 100 cycles min.  
  
 In accordance with IEC 61076-2-104:2014

P1	P2
1	1 Brown
2	2 White
3	3 Blue
4	4 Black

Item	Part Name	Materials / Finish(Color)	Q'TY
1	Contact	Copper Alloy / Au Plated	4
2	Bush	Copper Alloy / Ni Plated	1
3	Screw Nut	M8X1, Copper Alloy / Ni Plated	1
4	Over Mold	PVC / Black	1
5	Cable	UL2464, 4C, AWG #22, OD Ø4.0±0.2mm / Black	1

E-tec 2019 © - all rights reserved



UNIT	mm	CABLE LENGTH TOLERANCE	DRAWN	Cherry	DATE	28.12.2016
SCALE	Free	0 ~ 200mm -> ±10mm	CHECK	Cheng	DATE	02.07.2019
		201 ~ 1000mm -> ±20mm	APPROVE	Fagi	DATE	02.07.2019
		1001 ~ 1500mm -> ±25mm				
		1501 ~ 2100mm -> ±30mm				
		2100mm † -> ±40mm				

DWG. NO.	MCC-M08MA04/M08MA04	SHEET 1/1
SERIES NO.	MCC-M08MA04/XxxXXxx	REV. B

**M08 Cable Assembly**  
**4-Pin Male A - Coding**  
 Single / Double Ended