

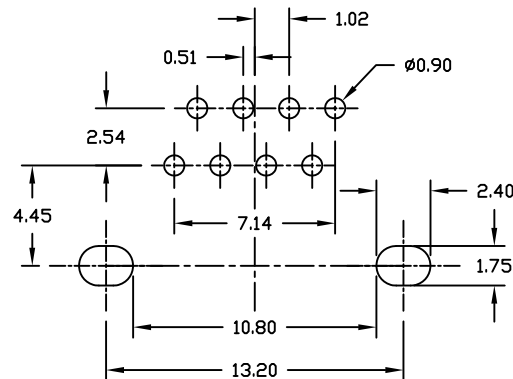

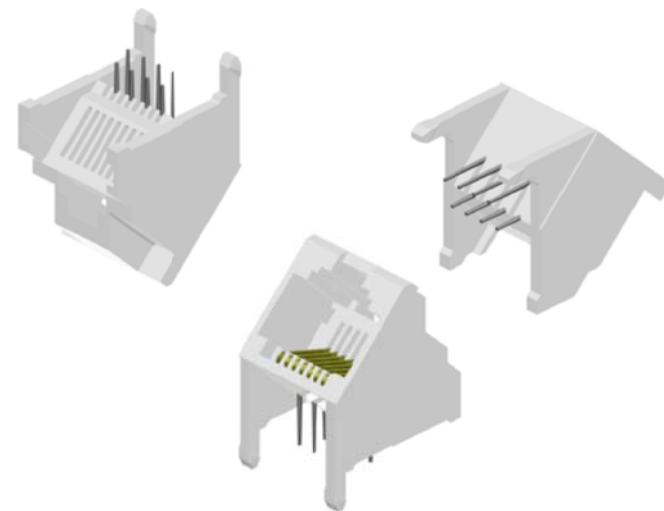
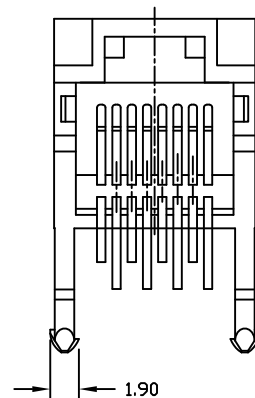


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A		RoHS	12.06.2006	GI
B		PN -S303- -> -S1S0-	12.06.2006	Ronny
C		New DWG. No.	01.02.2012	Ronny

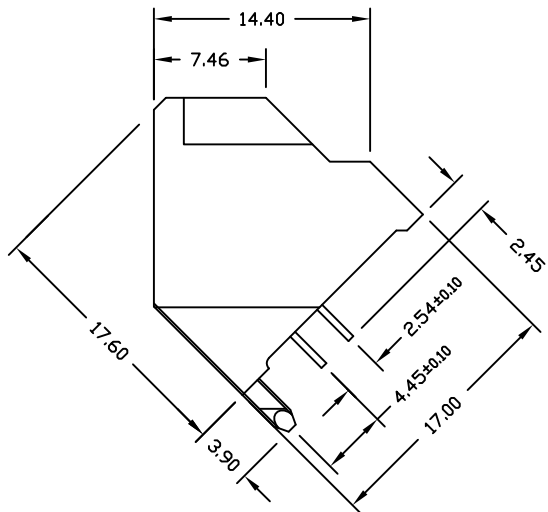

RECCOMENDED HOLE PATTERN

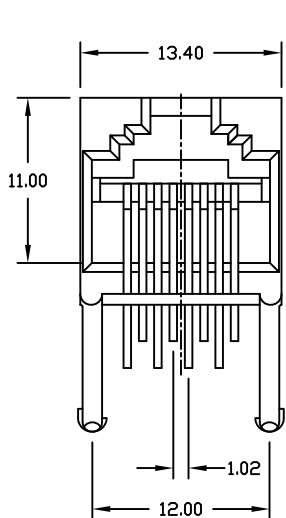

replace with "B" if black colour housing

PART NUMBER	GOLD PLATING CONTACT AREA
MJR-188-S1S0-95/W	3μ"
MJR-188-S1S0-96/W	6μ"
MJR-188-S1S0-97/W	15μ"
MJR-188-S1S0-98/W	30μ"
MJR-188-S1S0-9H/W	50μ"

NOTE :

- MATERIAL: HOUSING-PBT POLYESTER UL94V-0
STANDARD COLOR-WHITE
CONTACT-0,35x0,58mm
PHOS-BRONZE PLATED WITH
HARD GOLD SELECTIVE
- CAVITY CONFIRMS TO FCC RULES AND
REGISTRATION PAR68, SUBPARTS F.



UNIT	mm	GENERAL TOLERANCE		DRAWN	CHEN	DATE	09.11.2002	DWG. NO.	SHEET 1/1
SCALE	Free	X.° ±	X. ±	CHECK	RONNY	DATE	01.02.2012	1111501	REV.C
		.XX° ±	.XX ± 0.25	APPROVE	Hogi	DATE	01.02.2012	SERIES NO.	
		ANG. ± 0.5	.XXX ± 0.10					MJR-188-S1S0-9x/X	

45° RJ45 PCB JACK
<8P8C> NON SHIELDED