

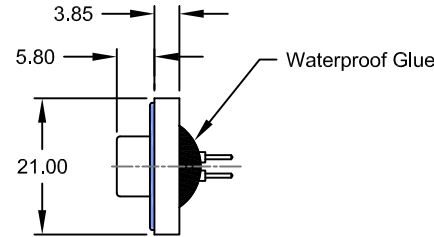




REV.	DESCRIPTION	DATE	DRAWN
A	New	05.04.2017	Ryan
B	general update	27.02.2018	Ronny
C	update	29.07.2019	Ronny

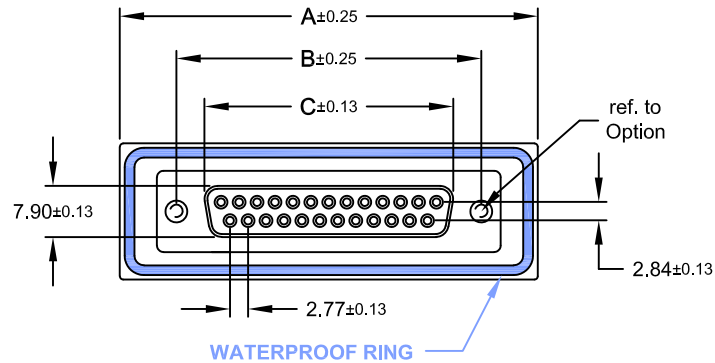






Order Code
SDF-xxx-SIP11-55/TXX

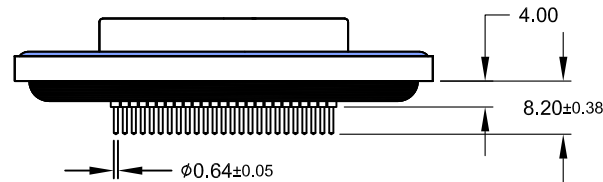

Dimension mm					No. of Contact
A	B	C	D	E	
39,40	24,99	16,33	20,00	28,20	009
47,70	33,32	24,66	28,00	36,50	015
64,50	47,04	38,38	41,50	51,00	025

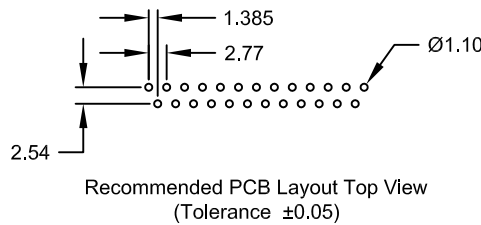

Panel Thickness
Screw "L" = 5.70 for Panel thickness "X" between 1.20~2.00mm

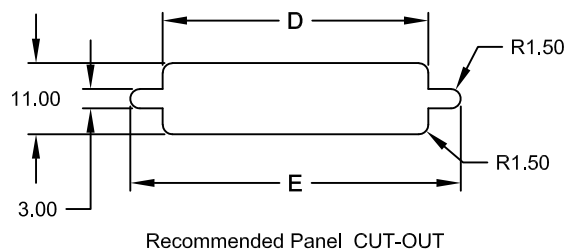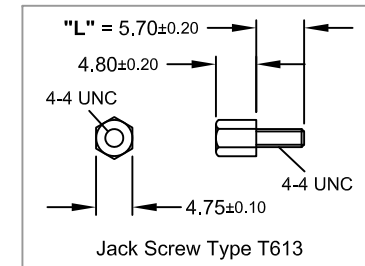

Specifications

Electrical

Current rating: 5A
Insulation resistance: 5000MΩ min.
Contact resistance: 10mΩ max.
Voltage rating: 250V AC rms max.
Withstanding voltage: 1000V AC rms

Material

Contact: Brass
Plating: Au flash over Ni
Insulator: PBT UL 94V-0
Shell: Steel
Plating: Ni

Operating temperature: -55°C to +85°C



Salt Spray: 48 Hours
Waterproof rating: IP 67 min.

E-tec 2019 © - all rights reserved



UNIT	mm	GENERAL TOLERANCE	
SCALE	Free	X.° ±	X. ±
		.X° ±	.X ±
		.XX° ±	.XX ± 0.25
		.XXX° ±	.XXX ±

DRAWN	Ryan	DATE	05.04.2017
CHECK	Ronny	DATE	29.07.2019
APPROVE	Fagi	DATE	29.07.2019

DWG. NO.	SDF-SIP11/T	SHEET 1/1
SERIES NO.	SDF-xxx-SIP11-xx/TXX	REV. C

Waterproof D-Sub
Standard "Female"
Straight Solder Tail Type