
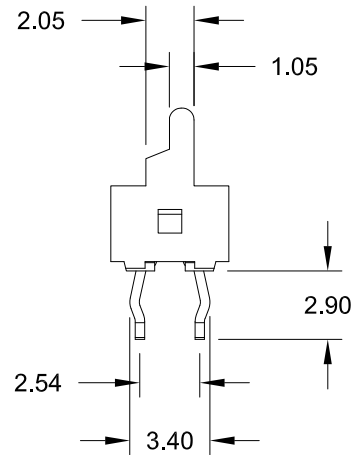
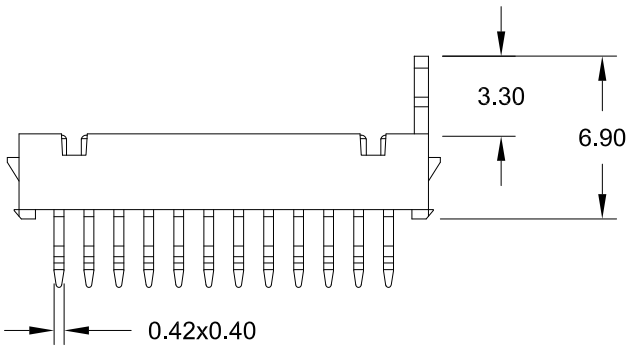
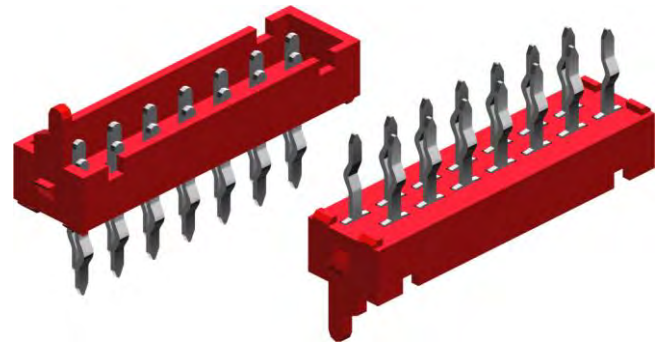


# Mini - Mate Connector


- THT - straight male Shrouded

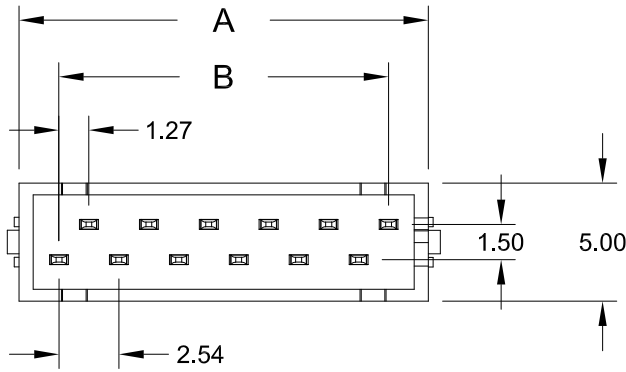

### Specifications

Current rating	1.5 A max.
Voltage rating	230 V AC/DC
Withstanding voltage	500 V AC
Contact resistance	20 mΩ max.
Insulation resistance	1000 MΩ min.
Operating temperature	- 55°C to +105°C
Insulator material	(RoHS compliant) PBT (red) UL 94 V-0
Contact material	(RoHS compliant) Phosphor Bronze

### PCB Hole Layout

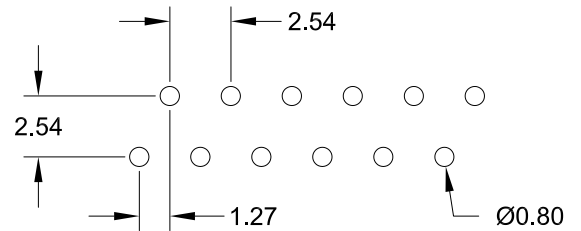

### Dimensions (mm)

Contacts	DIM "A"	DIM "B"	Contacts	DIM "A"	DIM "B"	Contacts	DIM "A"	DIM "B"
004	7.20	3.81	012	17.36	13.97	020	27.52	24.13
006	9.74	6.35	014	19.90	16.51			
008	12.28	8.89	016	22.44	19.05			
010	14.82	11.43	018	24.98	21.59			

### How to order

MMM - xxx - SS50 - 99

#### Nbr of contacts

004; 006; 008; 010  
012; 014; 016; 018  
020

#### Plating

99 = Tin  
(leadfree)  
other platings  
on request