
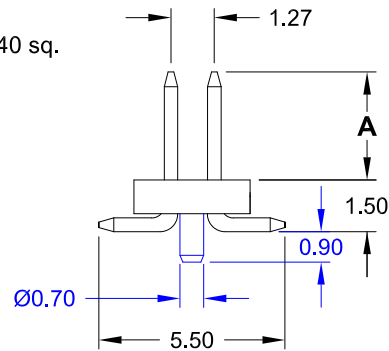
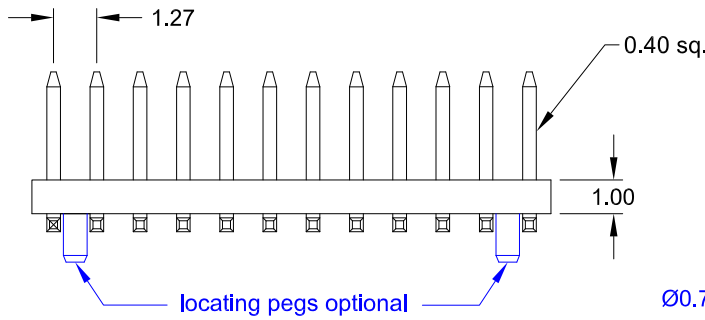
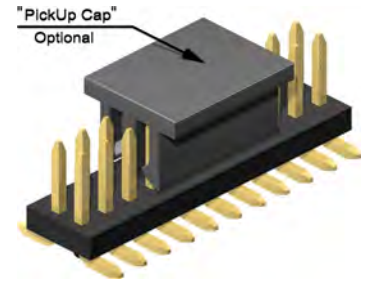



1.27mm pitch Pin Header
 - SMT - low profile dual row

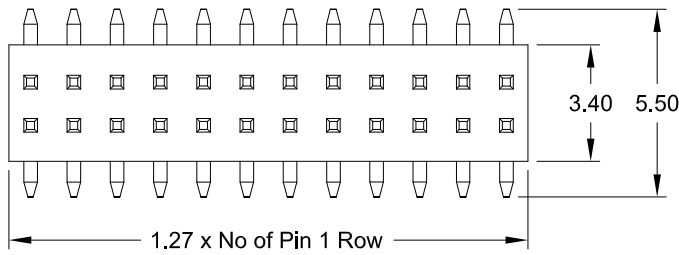

Application and Features

- **Standard: Tube packing, without "locating pegs" and without "PickUp Cap"**
- Assures reliable PC Board connections
- Low profile insulator
- Mates with 1.27mm pitch Female Headers

PCB Surface Mount Layout

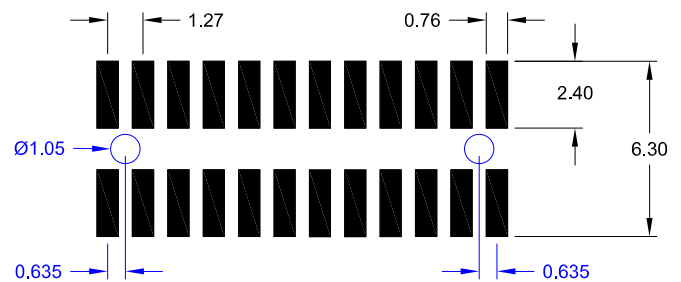

Specifications

Current rating	1 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material	(RoHS compliant) Copper Alloy
Insulator material	(RoHS compliant) PA6T UL 94 V-0

How to order

SS2 - xxx - H xx/x - 55/11 X

Nbr of pins	Pin code	DIM "A"	Plating	Options
without locating pegs: 006 to 100	70/0	3.00 mm	55 = Gold	without "locating pegs"
	70/1	10.00 mm		A = Tube packing; with „PickUp Cap“
	70/2	6.50 mm		B = Reel packing; with „PickUp Cap“
with locating pegs: 008 to 100	70/3	12.50 mm	other platings on request	with "locating pegs" (available only from 008 to 100 pins)
	70/4	4.00 mm		C = Tube packing; without „PickUp Cap“
	other dimensions on request			D = Tube packing; with „PickUp Cap“
				E = Reel packing; with „PickUp Cap“