


1.27mm pitch Box Header


- THT - right angle

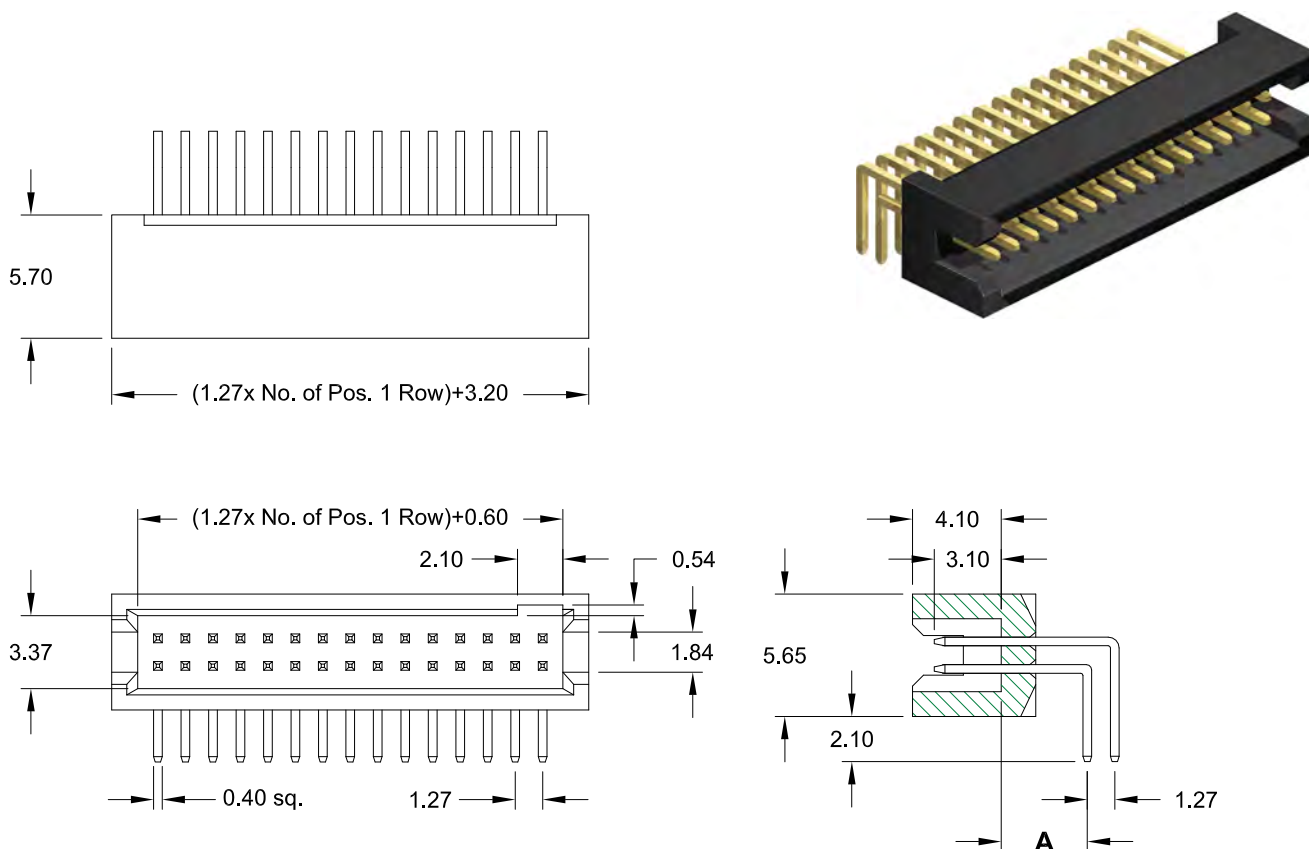

Specifications

Current rating	1 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	300 V AC
Operating temperature	- 40°C to +105°C
Contact material	(RoHS compliant) Copper Alloy
Insulator material	(RoHS compliant) LCP UL 94 V-0

PCB Hole Layout

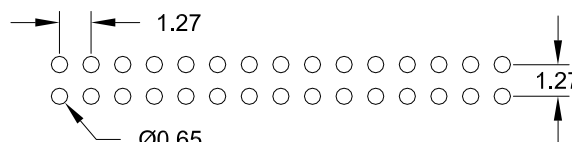

Application and Features

Mating with 1.27mm pitch Female Headers BS2-xxx-H45B- & -H45P-55/11 (page 33) as “board to board” connection.

No ejection latches for space saving.

How to order

SLS - xxx - R xxx/x - 55/11

Nbr of pins	<table><tr><td>Pin code</td><td>DIM “A”</td></tr><tr><td>565/0 <i>(standard)</i></td><td>2.10 mm</td></tr><tr><td>565/1</td><td>3.70 mm</td></tr><tr><td colspan="2">other dimensions on request</td></tr></table>	Pin code	DIM “A”	565/0 <i>(standard)</i>	2.10 mm	565/1	3.70 mm	other dimensions on request		Plating
Pin code	DIM “A”									
565/0 <i>(standard)</i>	2.10 mm									
565/1	3.70 mm									
other dimensions on request										
010 to 100		55 = Gold other platings on request								