
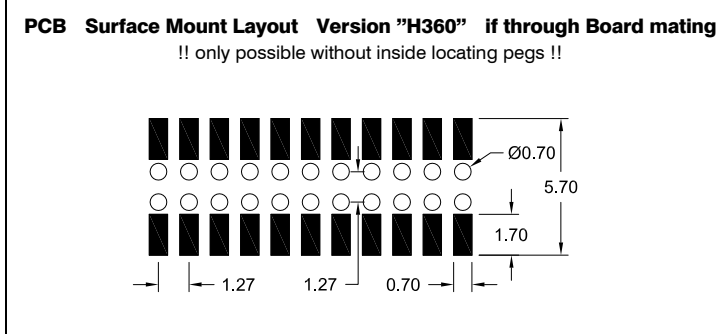
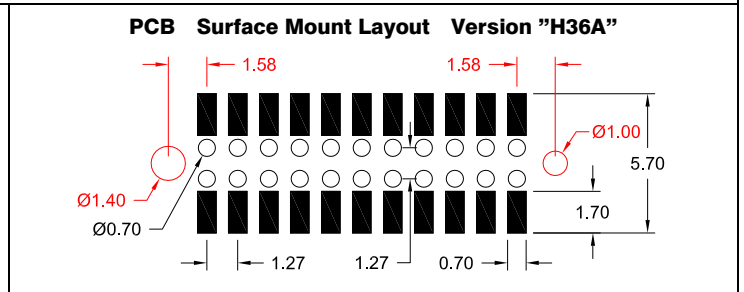
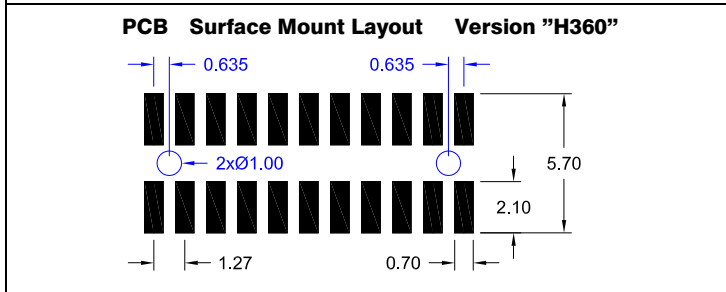


1.27mm pitch Female Header
 - SMT - dual row 3.60mm profile

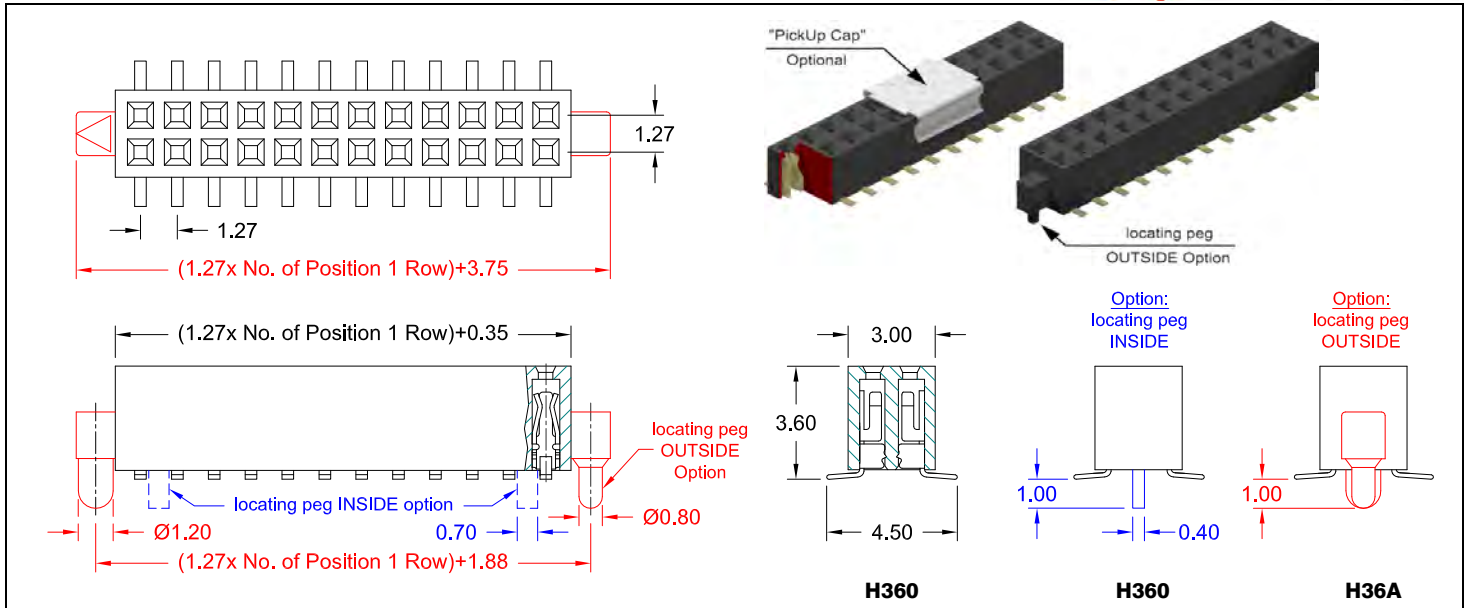

Application and Features

- **Standard: Tube packing, without locating pegs and without "PickUp Cap"**
- Also available with "PickUp Cap" for automatic suck assembly to the PCB
- Low profile, 3.60mm height Type. Hi-rel dual beam contacts.
- Mating with 1.27mm x 1.27mm pitch, 0.40mm square Pin Headers.
- Through Board mating possible

SPECIFICATIONS			
Current rating	1 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Processing temperature	+250°C +0/-5°C for 5sec.
Contact resistance	20 mΩ max.	Contact material	PhBz (Gold flash plated)
Withstanding voltage	300 V AC	Insulator material	(RoHS compliant) LCP UL 94 V-0

How to order

BS2 - xxx - H xxx - 55/11 X

Nbr of contacts	Style	Options
006 to 100	360 = without & with inside locating pegs 36A = with outside locating pegs	See below

Order Code Options

without "locating pegs"		with "locating pegs"	
BS2-xxx-H360-55/11	= Tube packing; w/o „PickUp Cap“	BS2-xxx-H360-55/11C	= Tube packing; w/o „PickUp Cap“
BS2-xxx-H360-55/11A	= Tube packing; with „PickUp Cap“	BS2-xxx-H360-55/11D	= Tube packing; with „PickUp Cap“
BS2-xxx-H360-55/11B	= Reel packing; with „PickUp Cap“	BS2-xxx-H36A-55/11D	= Tube packing; with „PickUp Cap“
		BS2-xxx-H360-55/11E	= Reel packing; with „PickUp Cap“
		BS2-xxx-H36A-55/11E	= Reel packing; with „PickUp Cap“