
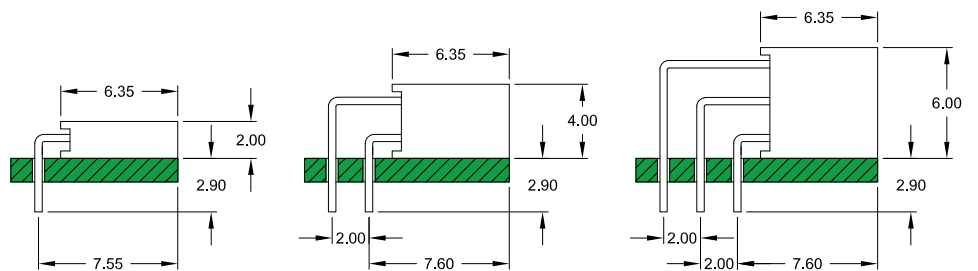
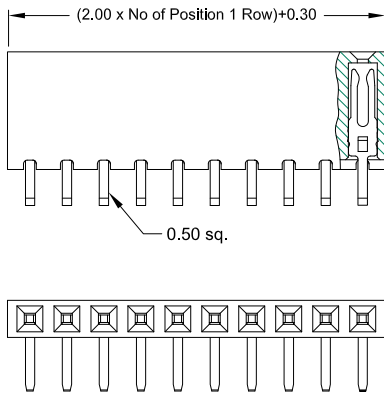



2.00mm pitch Female Header
 - THT - 6.35mm profile right angle

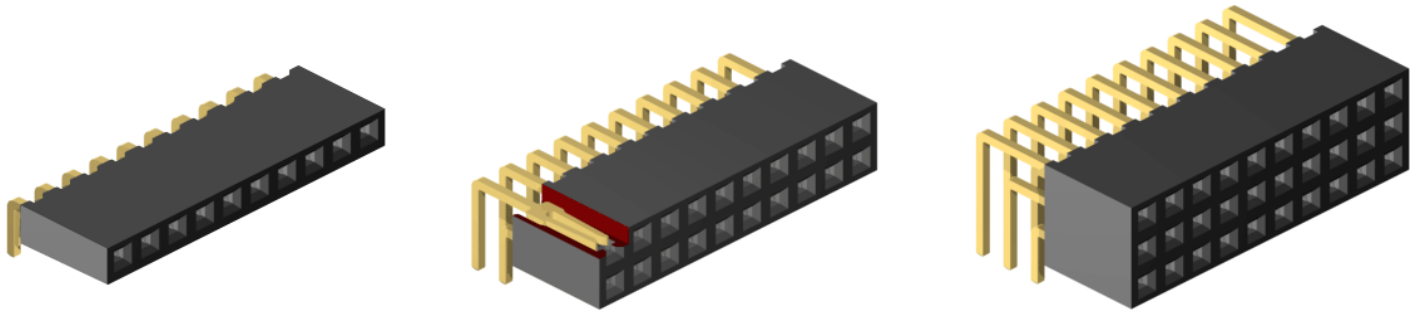

Application and Features

- For board-to-board connections
- Ideal solution for PC/104 Systems
- Accepts 0.50mm square pins
- Hi-rel fork contact design

PCB Hole Layout

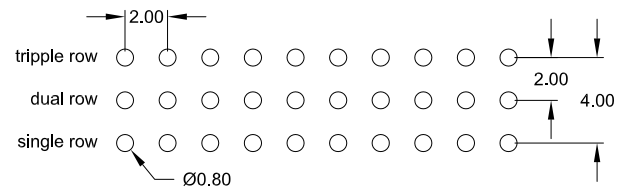

Specifications

Current rating	2 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Contact material	(RoHS compliant) Copper Alloy
Contact resistance	20 mΩ max.	Insulator material	(RoHS compliant) LCP UL 94 V-0
Withstanding voltage	500 V AC		

How to order

BL x - xxx - RH635 - 55/2

Rows
1 = single row
2 = dual row
3 = triple row

Nbr of contacts
single row = 002 to 040
dual row = 004 to 080
triple row = 006 to 120

Plating
55 = Gold
other platings on request