2.00mm pitch Female Header - THT - "PC 104+ Type"

Quad Row, 160 contacts max.

RoHS compliant

E-tec Interconnect

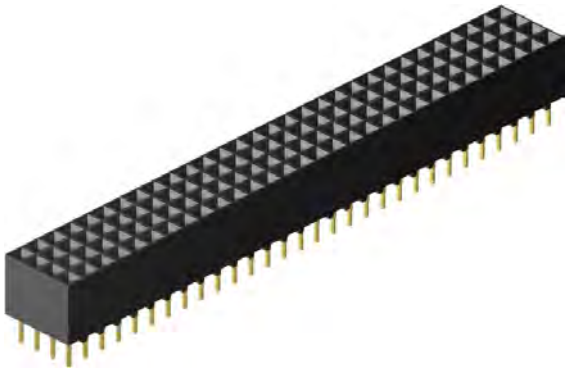

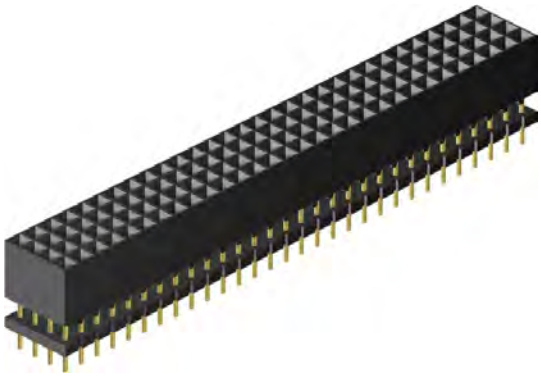

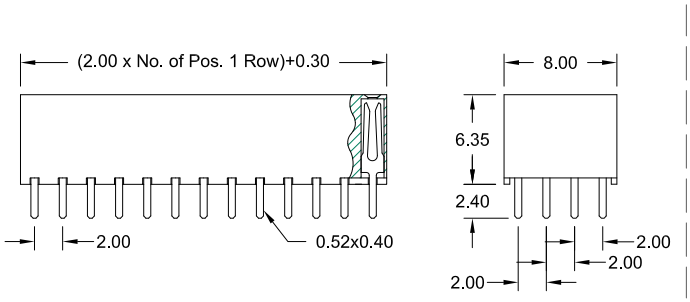

Style **630/0**

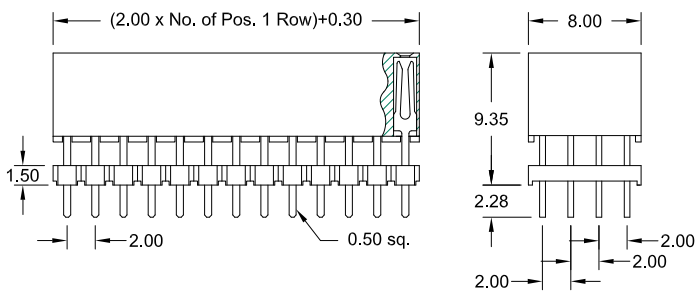

Style **630/1**

Specifications

Current rating	2 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material *(RoHS compliant)*	Phosphor Bronze
Insulator material *(RoHS compliant)*	LCP UL 94 V-0

PCB Hole Layout

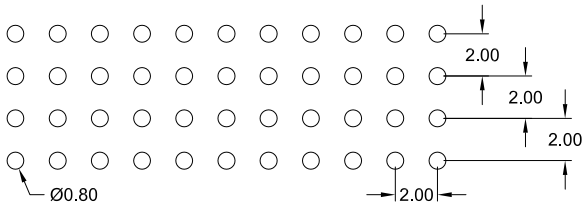

Application and Features

Low and high Profile PC/104-*Plus* Type

Designed for "board to board" small spacing interconnection

With standoff's for post solder cleaning

Mate with Pin Header SL4 – xxx – S830/x – xx/2

How to order

BL4 - xxx - S xxx/x - 55/2

Nbr of contacts
008 to **160**

Style	Dimension above PCB
630/0 *(standard)*	6.35 mm
630/1 *(raised)*	9.35 mm
other dimensions on request	

Plating
55 = Gold
other platings on request