
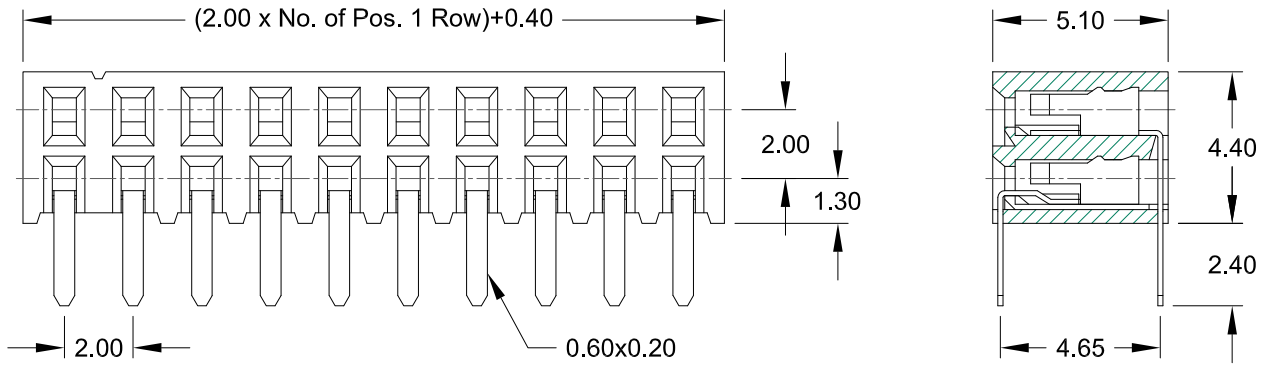
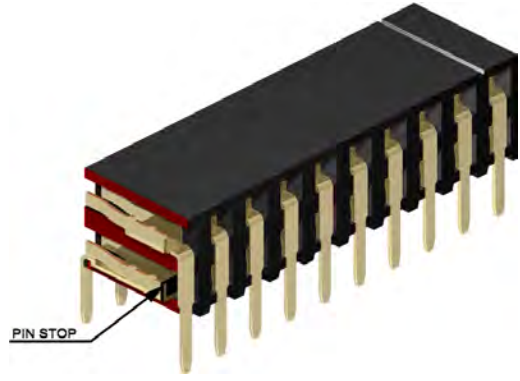



2.00mm pitch Female Header  
 - THT - side entry type

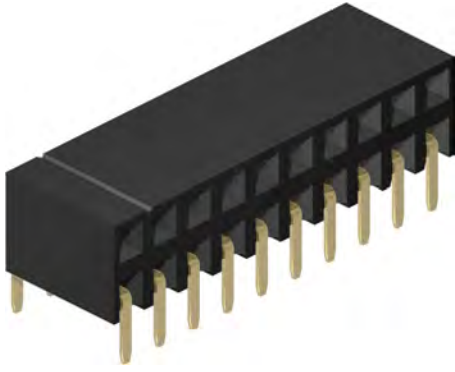

**Application and Features**

- **Standard: Tube packing**
- Hi-rel dual beam contact with "Pin Stop" assures reliable connections
- Accepts 0.50 mm square pins; Pin Header 2.00 mm x 2.00 mm
- 4.40 mm height above board
- Stand-off's facilitate post solder cleaning

**PCB Hole Layout**

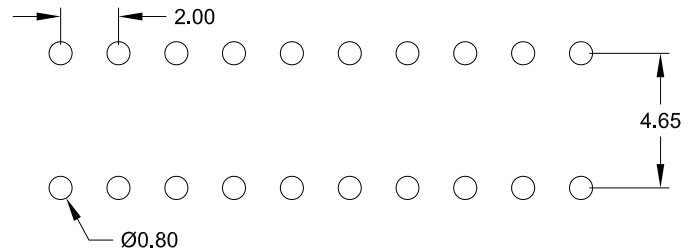

**Specifications**

|                       |              |                                     |                  |
|-----------------------|--------------|-------------------------------------|------------------|
| Current rating        | 2 A          | Operating temperature               | - 40°C to +105°C |
| Insulation resistance | 1000 MΩ min. | Contact material (RoHS compliant)   | Phosphor Bronze  |
| Contact resistance    | 20 mΩ max.   | Insulator material (RoHS compliant) | PA6T UL 94 V-0   |
| Withstanding voltage  | 500 V AC     |                                     |                  |

**How to order**

BH2 - xxx - R450 - 55/2

