


Foot Style: **160** **160** **161**

Application and Features

- **Standard: Tube packing, without "locating pegs" and without "PickUp Cap"**
- Designed for "Board to Board" spacing
- Variable terminal length available
- Mate with Female Header 2.54mm pitch

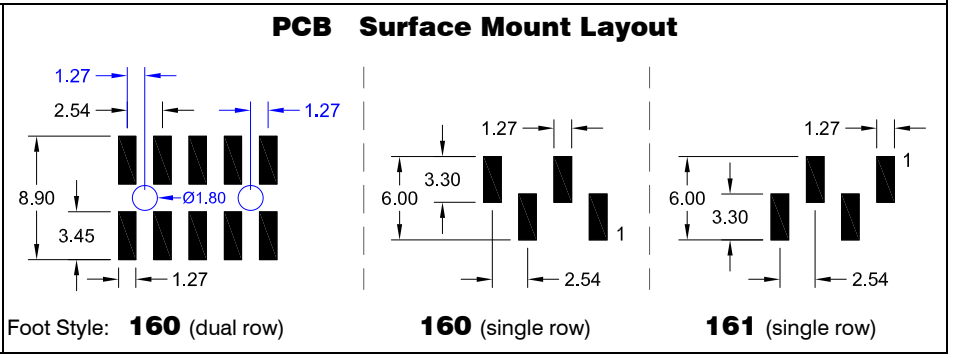

Specifications

Current rating	3 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Processing temperature	+250°C +0/-5°C for 5sec.
Withstanding voltage	500 V AC	Contact material	(RoHS compliant) Copper alloy
		Insulator material	(RoHS compliant) PA6T UL 94 V-0

How to order

SP **X** - **xxx** - H **xxx** / **xx** - **55** X

Rows	Nbr of pins	Foot Style	Pin code	DIM "A"	DIM "B"	Plating	Options	
1 single row	002 to 040	160 161 <small>Pls. choose 160 Style if odd pin count.</small>	16	3,50 mm	5,30 mm	55 = Gold other platings on request	without "locating pegs" A = Tube packing; with „PickUp Cap“ B = Reel packing; with „PickUp Cap“	
			03	5,50 mm	6,40 mm			
2 dual row	004 to 080	160	12	5,50 mm	7,50 mm		other platings on request	with "locating pegs" dual row only! C = Tube packing; w/o „PickUp Cap“ D = Tube packing; with „PickUp Cap“ E = Reel packing; with „PickUp Cap“
			04	7,50 mm	9,40 mm			
			07	5,90 mm	10,60 mm			
			09	3,70 mm	10,70 mm			
			01	6,00 mm	11,40 mm			
			15	6,90 mm	12,50 mm			
			14	8,80 mm	13,60 mm			
			06	5,50 mm	14,00 mm			
			17	7,00 mm	14,50 mm			
			05	6,00 mm	15,50 mm			
13	8,80 mm	16,10 mm						
02	4,50 mm	17,00 mm						
08	6,00 mm	28,00 mm						
10	2,70 mm	28,30 mm						
11	4,00 mm	34,30 mm						
			other dimensions on request					