


**Application and Features**

- **Standard: Tray packing and without "PickUp Cap"**
- Also available "Reel" packing
- Mating devices for Female Headers, solder tail and IDC Type
- Reliable flat cable to PCB connection
- No ejector latches for space saving

**PCB Surface Mount Layout**

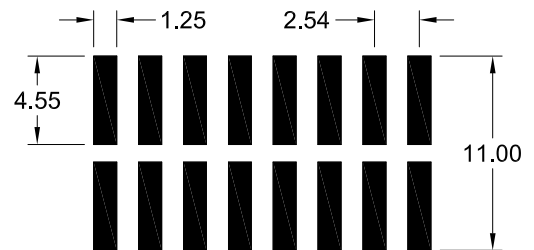

**Specifications**

Current rating	3 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Processing temperature	+250°C +0/-5°C for 5sec.
Withstanding voltage	500 V AC	Contact material	(RoHS compliant) Brass
		Insulator material	(RoHS compliant) PA6T UL 94 V-0

**How to order**

**SLS - xxx - H885 - 55 / X**

Nbr of pins
<b>006; 008; 010; 012</b>
<b>014; 016; 020; 024</b>
<b>026; 030; 034; 040</b>
<b>044; 050</b>

Plating
<b>55</b> = Gold
other platings on request

Packing and „PickUp Cap“ Option
<b>F</b> = Tray packing; with „PickUp Cap“
<b>T</b> = Tube packing; without „PickUp Cap“
<b>A</b> = Tube packing; with „PickUp Cap“
<b>B</b> = Reel packing; with „PickUp Cap“