
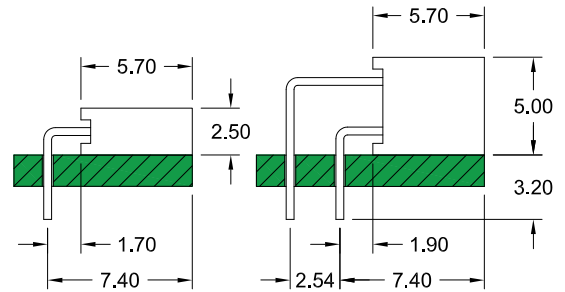

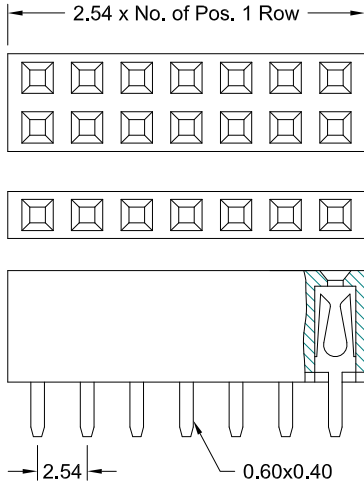
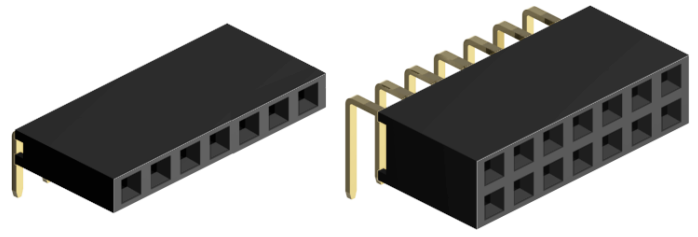


2.45mm pitch Female Header  
 - THT - 5.70mm profile

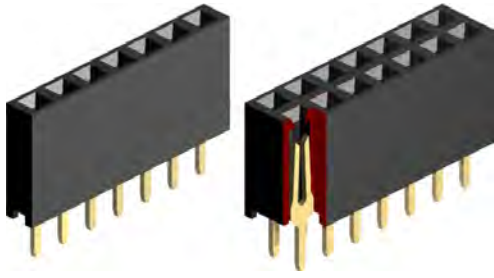

Style


S570

R570

**Specifications**

Current rating	3 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material	(RoHS compliant) Phosphor Bronze
Insulator material	(RoHS compliant) PBT UL 94 V-0

**PCB Hole Layout**

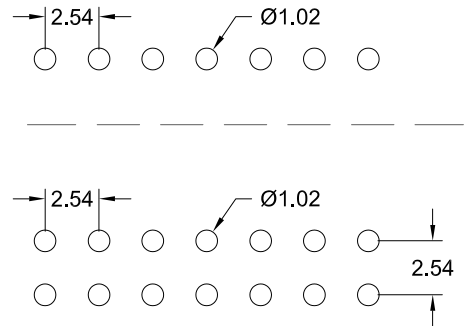

How to order

BL x - xxx - X 570 - 55

Rows	
<b>1</b>	= single row
<b>2</b>	= dual row

Nbr of contacts	
single row	= <b>002</b> to <b>040</b>
dual row	= <b>004</b> to <b>080</b>

Connector Style	
<b>S</b>	= straight
<b>R</b>	= right angle

Plating	
<b>55</b>	= Gold
	other platings on request