



2.54mm pitch Female Header
 - THT - dual entry type low profile

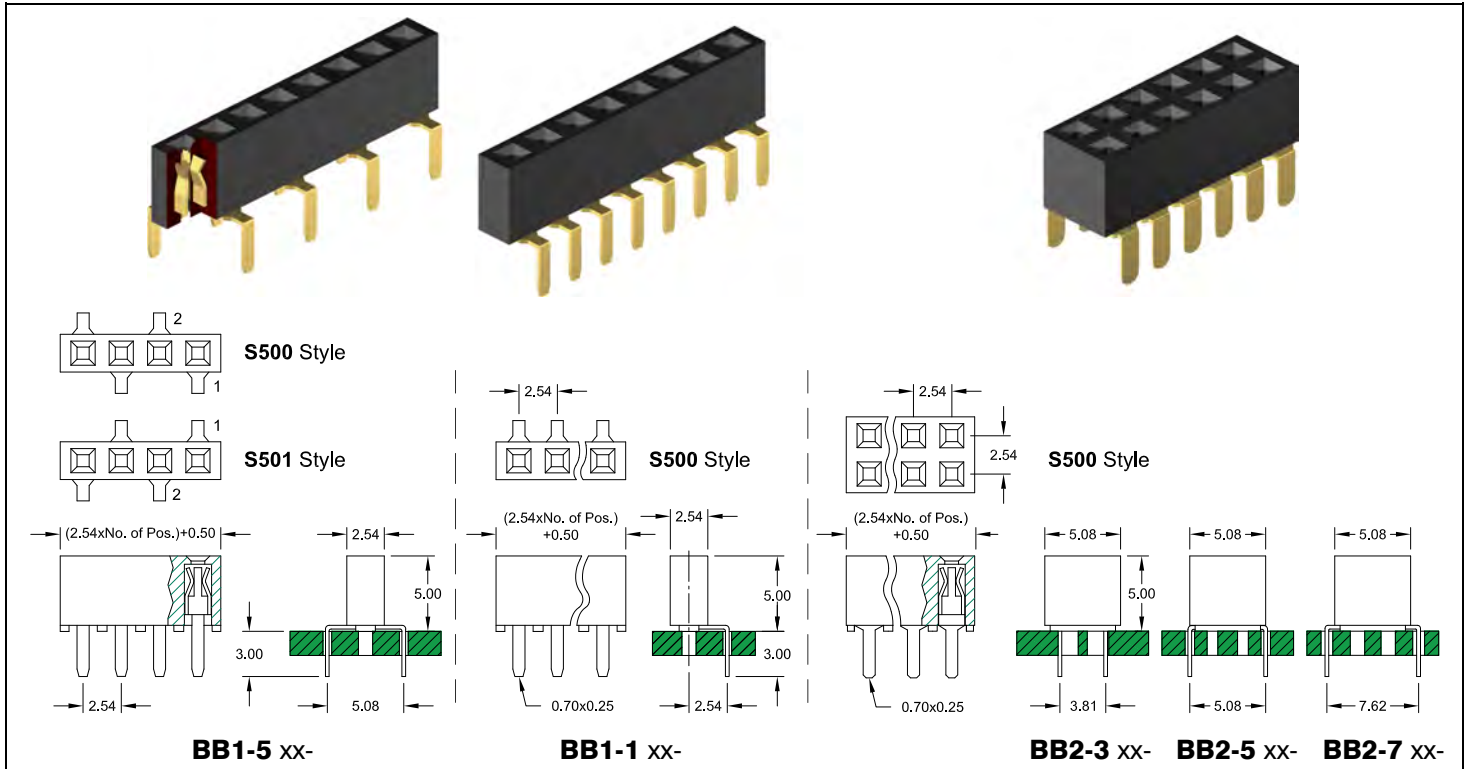

PCB Hole Layout

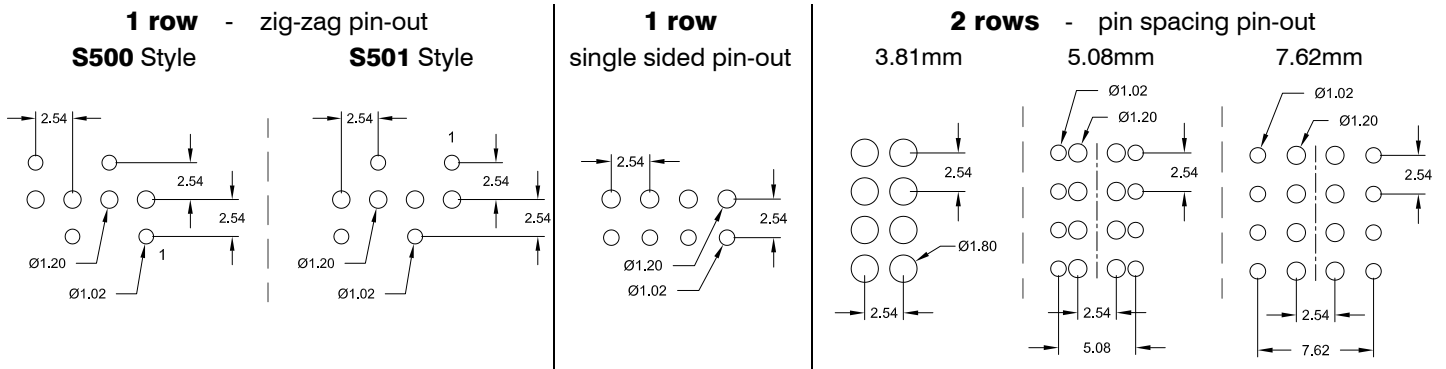

Application and Features

- Hi-rel dual beam contact assures reliable PCB connections
- Dual entry design for board stacking
- Accepts 0.64mm square pins
- Stand-off's facilitate post solder cleaning

Specifications

Current rating	3 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material (RoHS compliant)	Phosphor Bronze
Insulator material (RoHS compliant)	PBT UL 94 V-0

How to order

BB x - x xx - S xxx - 55

Rows	Pin spacing	Nbr of contacts	Foot Style	Plating
1 = single row	1 = single side only 5 = 5.08mm zig-zag	<i>single row</i> 02 to 40	<i>single row</i> 500 & 501 Pls. choose 500 Style if odd pin count.	55 = Gold
2 = dual row	3 = 3.81 mm 5 = 5.08 mm 7 = 7.62 mm	<i>dual row</i> 04 to 80	<i>dual row</i> 500	other platings on request