



**PCB Surface Mount Layout -single row-**

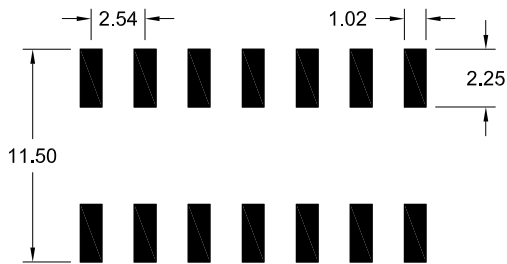

**PCB Surface Mount Layout -dual row-**

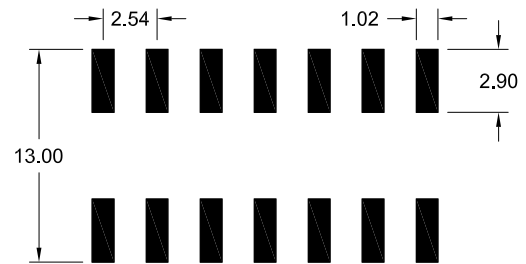

**Application and Features**

- **Standard: Tube packing**
- Hi-rel dual beam contact assures reliable PC-board connections
- Accepts 0.64mm square pins
- Stand-off's facilitate post solder cleaning
- Lowest possible profile
- Automatic assembly to PCB possible

**Specifications**

Current rating	3 A	Operating temperature	- 40°C to +105°C
Insulation resistance	1000 MΩ min.	Processing temperature	+250°C +/-5°C for 5sec.
Contact resistance	20 mΩ max.	Contact material (RoHS compliant)	Phosphor Bronze
Withstanding voltage	500 V AC	Insulator material (RoHS compliant)	PA6T UL 94 V-0

**How to order**

BS x - xxx - R390 - 55 /X

