



2.00mm pitch Pin Header
- THT - straight & right angle

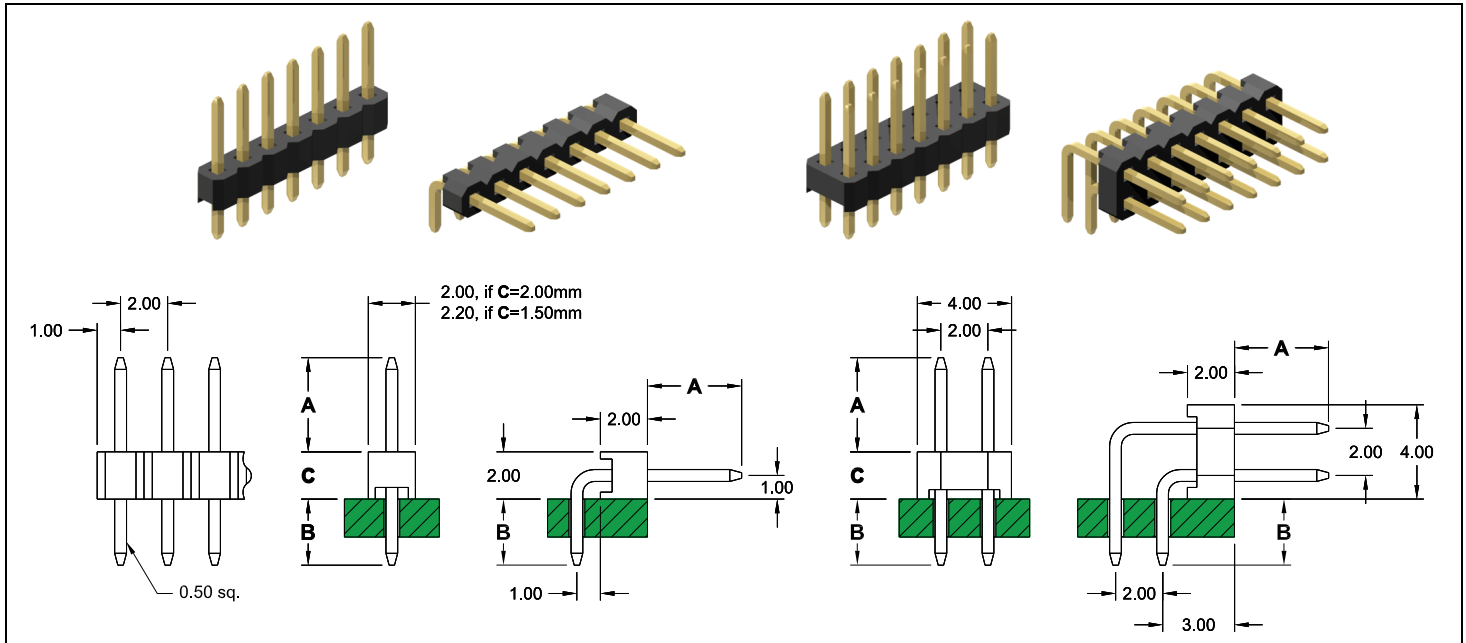

Specifications

Current rating	2 A
Insulation resistance	1000 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material	Copper alloy
Insulator material	PBT or PA6T UL 94 V-0
	Standard : PBT

PCB Hole Layout

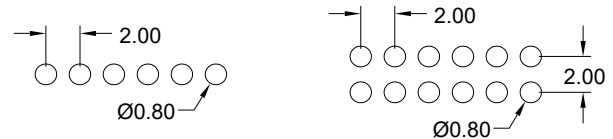

Application and Features

- Side and end stackable.
- Variable terminal lengths as well as two insulator thicknesses available for the straight type.
- Notches for easy breaking.
- Straight type with standoff's for post solder cleaning.

How to order

SL x - xxx - X xxx/xx - 55/2

Rows	Nbr of pins	Pin Style	DIM "C"	Material Code	Pin code	DIM "A"	DIM "B"	Plating
1 = single row	002 to 040	straight	2.00 mm	S = P.B.T. N = PA6T	088/01	4.00 mm	2.80 mm	55 = Gold (standard) 99 = Tin (leadfree tin) other platings on request
					088/02	6.00 mm	2.80 mm	
088/03	6.80 mm				3.00 mm			
088/04	4.00 mm				4.00 mm			
088/05	3.70 mm				5.00 mm			
2 = dual row	004 to 080		1.50 mm	B = PA6T	096/00	4.00 mm	2.80 mm	
					096/01	6.00 mm	2.10 mm	
096/02	4.50 mm				4.00 mm			
096/03	1.70 mm				8.80 mm			
096/04	4.00 mm				2.30 mm			
right angle	2.00 mm	R = P.B.T. K = PA6T	2.00 mm	096/05	3.20 mm	3.50 mm		
				096/06	4.00 mm	4.00 mm		
				096/07	7.00 mm	2.20 mm		
				096/08	3.60 mm	3.00 mm		
				096/09	21.00 mm	2.54 mm		
				096/10	5.10 mm	3.00 mm		
					106/01	4.00 mm	2.80 mm	
					106/02	10.00 mm	2.80 mm	
					106/03	11.00 mm	2.80 mm	
					106/04	2.50 mm	2.80 mm	
					106/05	5.00 mm	2.80 mm	
					106/06	11.00 mm	2.40 mm	
					106/07	6.00 mm	2.80 mm	
other dimensions on request								