


**Application and Features**

- **Standard: Tube packing**
- Hi-rel dual beam contact with "Pin Stop" assures reliable connections
- Accepts 0.64 mm square pins; Pin Header 2.54 mm x 2.54 mm
- 3.40 mm & 5.90 mm height above board
- Stand-off's facilitate post solder cleaning

**PCB Hole Layout**

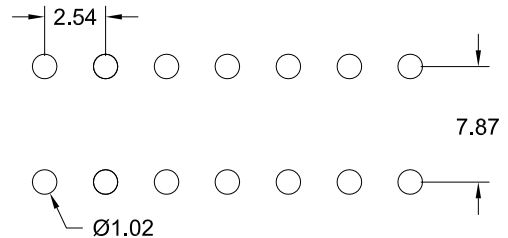

**Specifications**

Current rating	3 A
Insulation resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to + 105°C
Contact material	(RoHS compliant) Phosphor Bronze
Insulator material	(RoHS compliant) PBT UL 94 V-0

**How to order**

BH x - xxx - R850 - 55

