
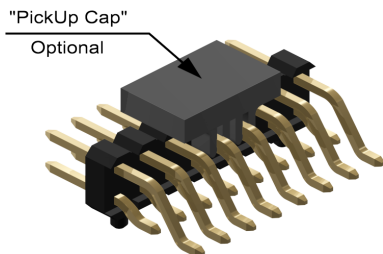


No. of Pins	Dimension mm		
	L1	L2	L3
006	4,00	6,00	2,00
008	6,00	8,00	4,00
010	8,00	10,00	6,00
012	10,00	12,00	8,00
014	12,00	14,00	10,00
016	14,00	16,00	12,00
018	16,00	18,00	14,00
020	18,00	20,00	16,00
022	20,00	22,00	18,00
024	22,00	24,00	20,00
026	24,00	26,00	22,00
028	26,00	28,00	24,00
030	28,00	30,00	26,00
032	30,00	32,00	28,00
034	32,00	34,00	30,00
036	34,00	36,00	32,00
038	36,00	38,00	34,00
040	38,00	40,00	36,00
042	40,00	42,00	38,00
044	42,00	44,00	40,00
046	44,00	46,00	42,00
048	46,00	48,00	44,00
050	48,00	50,00	46,00
052	50,00	52,00	48,00
054	52,00	54,00	50,00
056	54,00	56,00	52,00
058	56,00	58,00	54,00
060	58,00	60,00	56,00
062	60,00	62,00	58,00
064	62,00	64,00	60,00
066	64,00	66,00	62,00
068	66,00	68,00	64,00
070	68,00	70,00	66,00
072	70,00	72,00	68,00
074	72,00	74,00	70,00
076	74,00	76,00	72,00
078	76,00	78,00	74,00
080	78,00	80,00	76,00




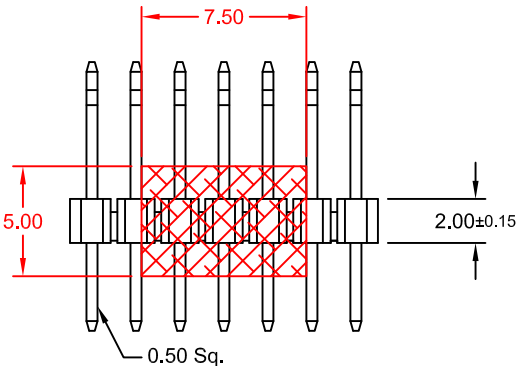


**Order Code**  
**SR2-xxx-H127/x-xx/2X**

No. of Contact  
 without locating pegs  
**004 to 080**  
 with locating pegs  
**008 to 080**

DIM "A" (mm)	Pin code
4,00	127/0
6,00	127/1
4,45	127/2
5,00	127/3
3,20	127/4
3,50	127/5
8,00	127/6
4,80	127/7

Packing  
 without "locating pegs"  
**A** = Tube; with PickUp Cap  
**B** = Reel; with PickUp Cap  
 with "locating pegs"  
**C** = Tube; without PickUp Cap  
**D** = Tube; with PickUp Cap  
**E** = Reel; with PickUp Cap

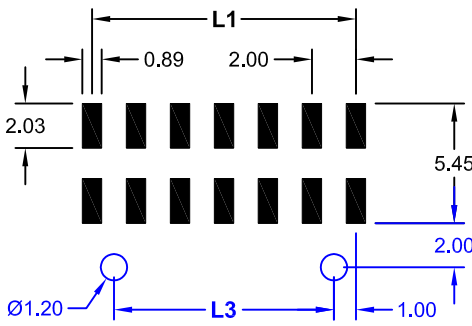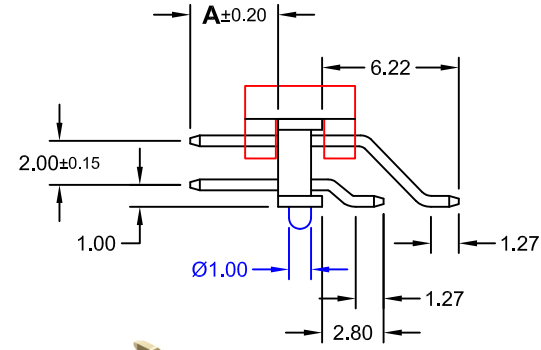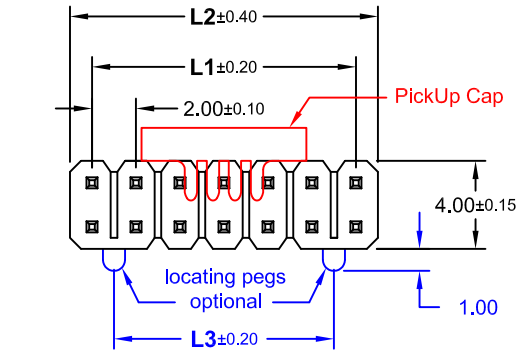


**Specifications**

**Electrical**  
 Current rating: 2A  
 Insulation resistance: 1000MΩ min.  
 Contact resistance: 20mΩ max.  
 Withstanding voltage: 500V AC/DC

**Material**  
 Contact: Brass  
 Plating: Gold, Tin or Duplex  
 \*Duplex = Tin on solder, Gold on contact area  
 Insulator: PA9T (black) UL 94V-0  
 Operating temperature: -40°C to +105°C  
 Processing temperature: +250°C +0/-5°C for 5 seconds

Recommended PCB Layout Top View  
 (Tolerance ±0.05)

E-tec 2019 © - all rights reserved

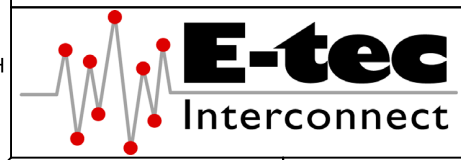

UNIT	GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	SHEET 1/1
mm	X.° ±	X. ±	Ryan	06.01.2012	SR2-H127/2	REV. H
SCALE	.X° ±	.X ±	Hogi	09.04.2019	SERIES NO.	
	.XX° ±	.XX ± 0.25	APPROVE	DATE	SR2-xxx-H127/x-xx/2X	
	.XXX° ±	.XXX ±	Hogi	09.04.2019		

**SMT Pin Header Slanted**  
**2.00mm pitch** Dual Row  
 with & without locating pegs  
**1.00mm to Pin center**