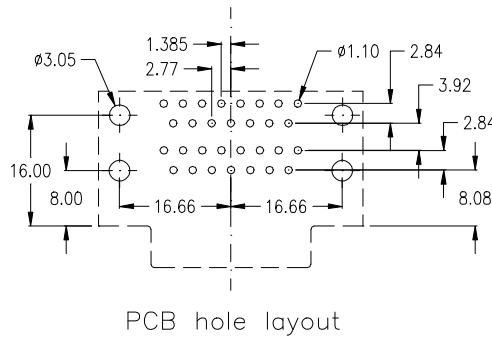
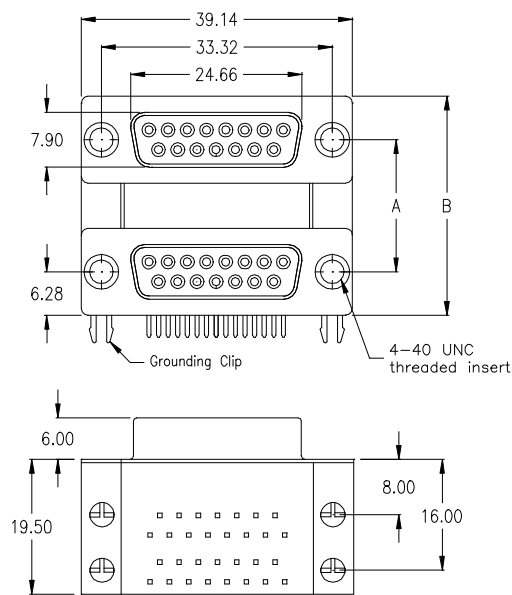





15-pin female / 15-pin female

PCB hole layout

Mounting Hole ϕ 3.20


Style "-F"

Style "-FJ"



Ferrite

Type "-FSxx"



Grounding Clip

Style "-FN"

Style "-FNJ"

without grounding clips
just 4 mounting holeswithout grounding clips,
just 4 mounting holes;
4 jack screws 4-40 UNC
mountedwith 4 grounding clips
(as above drawing)with 4 grounding clips;
4 jack screws 4-40 UNC
mounted

Distance Dimensions

SDD-1515-1-95-F

SDD-1515-1-95-FJ

SDD-1515-1-95-FN

SDD-1515-1-95-FNJ

„A“ = 22.86

„B“ = 35.41

SDD-1515-2-95-F

SDD-1515-2-95-FJ

SDD-1515-2-95-FN

SDD-1515-2-95-FNJ

„A“ = 19.05

„B“ = 31.60

SDD-1515-3-95-F

SDD-1515-3-95-FJ

SDD-1515-3-95-FN

SDD-1515-3-95-FNJ

„A“ = 15.87



„B“ = 28.42

if with Ferrite Filter: -FS


if with Ferrite Filter: -FSJ

if with Ferrite Filter: -FSN

if with Ferrite Filter: -FSNJ

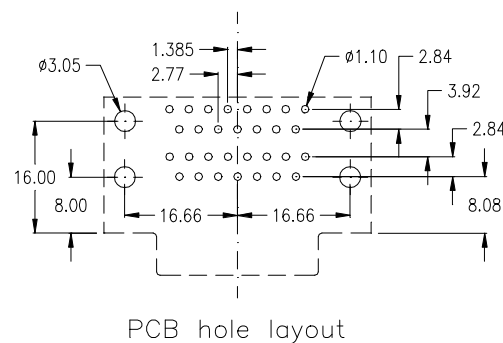
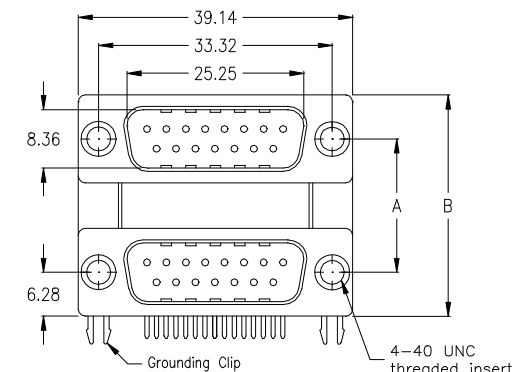
15-pin male / 15-pin male

PCB hole layout

Mounting Hole ϕ 3.20


Style "-M"

Style "-MJ"



Ferrite

Type "-MSxx"



Grounding Clip

Style "-MN"

Style "-MNJ"

without grounding clips
just 4 mounting holeswithout grounding clips,
just 4 mounting holes;
4 jack screws 4-40 UNC
mountedwith 4 grounding clips
(as above drawing)with 4 grounding clips;
4 jack screws 4-40 UNC
mounted

Distance Dimensions

SDD-1515-1-95-M

SDD-1515-1-95-MJ

SDD-1515-1-95-MN

SDD-1515-1-95-MNJ

„A“ = 22.86

„B“ = 35.41

SDD-1515-2-95-M

SDD-1515-2-95-MJ

SDD-1515-2-95-MN

SDD-1515-2-95-MNJ

„A“ = 19.05

„B“ = 31.60

SDD-1515-3-95-M

SDD-1515-3-95-MJ

SDD-1515-3-95-MN

SDD-1515-3-95-MNJ

„A“ = 15.87

„B“ = 28.42

if with Ferrite Filter: -MS

if with Ferrite Filter: -MSJ

if with Ferrite Filter: -MSN

if with Ferrite Filter: -MSNJ