

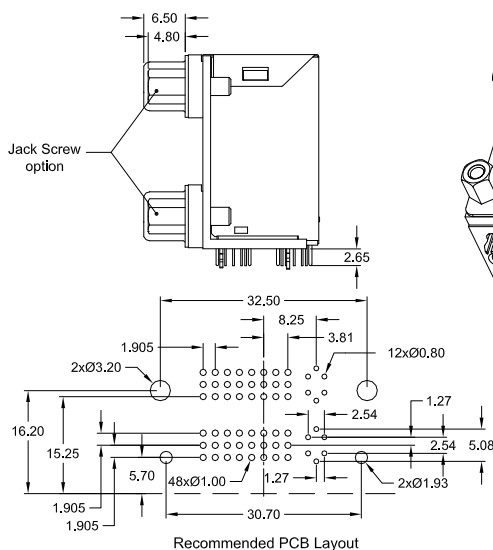


Analog & Digital Type fully shielded

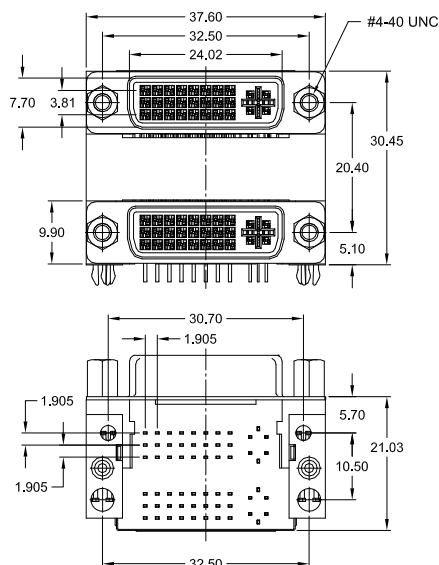

Specifications

Electrical:	
Current rating	1.5 A min. per Contact
Insulator resistance	1000 M Ω min.
Contact resistance (upper/lower)	30 / 20 m Ω max.
Dielectric strength	1000 V for 1 Min.
Withstanding voltage	500V (rms) AC 1 Min.
Operating temperature	-55° C to +85° C
Mechanical:	
Insertion force (total)	4.5 Kg max.
Withdrawal force (total)	1.0 Kg min.
Durability	100 Cycles
Material:	
Contact	Copper Alloy
Insulator	PBT UL 94V-0
Shell	SPCC Ni plated
Shield	Stainless Steel

How to order




DVD - 2929 - NAD9 - **xx /W S X**

Plating
95 = Tin (leadfree) / Gold flash
On request:
97 = Tin (leadfree) / Gold 15 μ "
98 = Tin (leadfree) / Gold 30 μ "

Housing Color
W = white (standard)
B = black (option)

Option
J
4 Jack Screws 4-40 UNC

Digital Type fully shielded

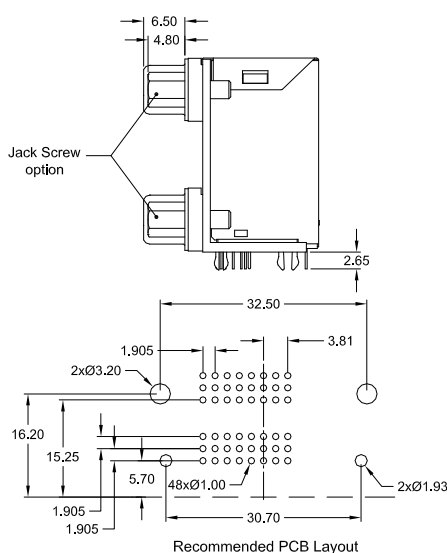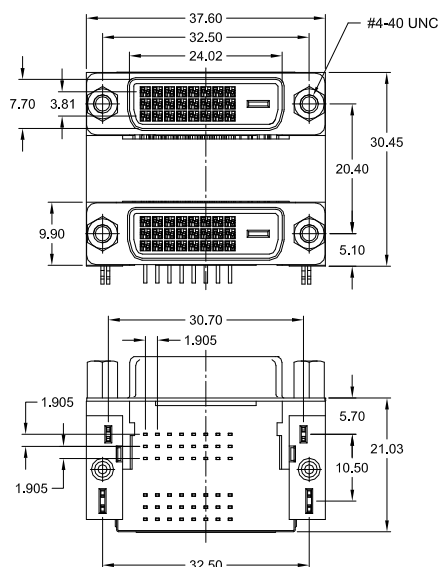

Specifications

Electrical:	
Current rating	1.5 A min. per Contact
Insulator resistance	1000 M Ω min.
Contact resistance (upper/lower)	30 / 20 m Ω max.
Dielectric strength	1000 V for 1 Min.
Withstanding voltage	500V (rms) AC 1 Min.
Operating temperature	-55° C to +85° C
Mechanical:	
Insertion force (total)	4.5 Kg max.
Withdrawal force (total)	1.0 Kg min.
Durability	100 Cycles
Material:	
Contact	Copper Alloy
Insulator	PBT UL 94V-0
Shell	SPCC Ni plated
Shield	Stainless Steel

How to order

DVD - 2424 - NDD9 - **xx /W S X**

Plating
95 = Tin (leadfree) / Gold flash
On request:
97 = Tin (leadfree) / Gold 15 μ "
98 = Tin (leadfree) / Gold 30 μ "

Housing Color
W = white (standard)
B = black (option)

Option
J
4 Jack Screws 4-40 UNC