

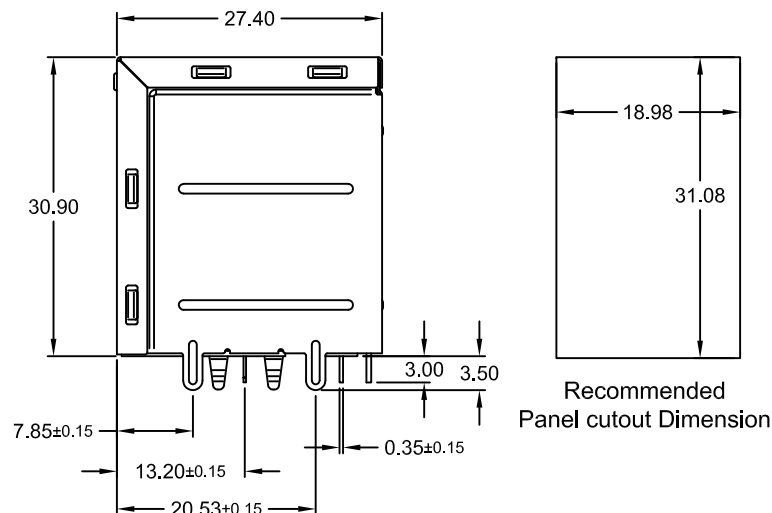
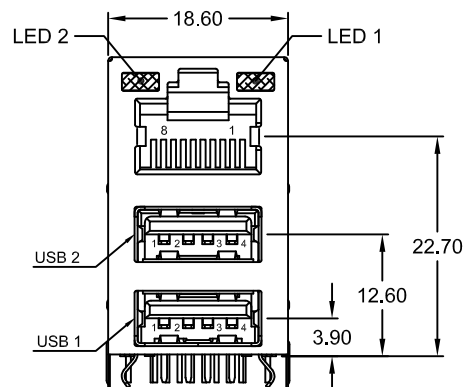
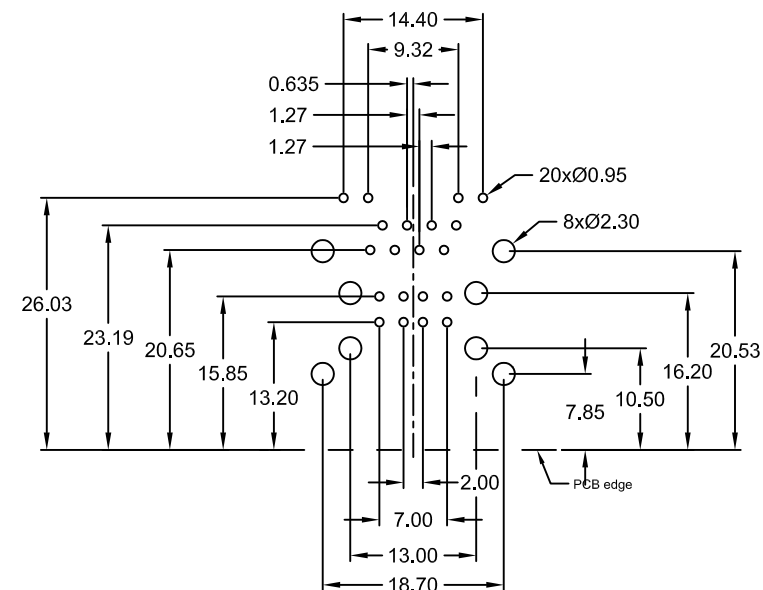



REV.	DESCRIPTION	DATE	DRAWN
A	New	06.12.2006	RH
B	New DWG. No.	01.02.2012	Ronny
C	general update	20.12.2016	Ronny



Recommended Panel cutout Dimension

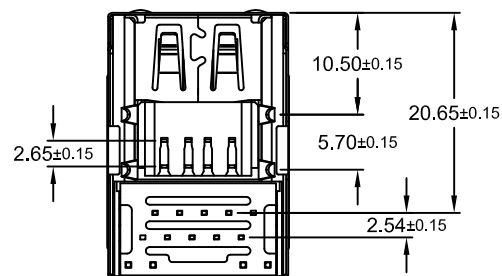

Recommended PCB Layout Top View
(Tolerance ±0.05)

Replace "X" with
LED Color Options

PART NUMBER	GOLD PLATING CONTACT AREA
MJS-3U88-S0L0-96/ExCS	6µ"

LED Color Options	
LED 2	LED 1
1 YELLOW	GREEN
2 NO LED	GREEN
3 GREEN	NO LED
4 GREEN	YELLOW
5 GREEN	GREEN
6 YELLOW	YELLOW
7 ORANGE/GREEN	ORANGE/GREEN
8 YELLOW/GREEN	YELLOW/GREEN
9 RED	NO LED



Specifications

Electrical

Current rating: 1.5A
Insulation resistance: 500MΩ min.
Contact resistance: 50mΩ max.
Withstanding voltage: 500V AC / 1 Minute

Material

Contact: Phosphor Bronze
Plating: Sn on solder area;
Au on contact area
Shield: Brass
Plating: Ni
Insulator RJ45: PBT (black) UL 94V-0
Insulator USB: PBT (black) UL 94V-0
Operating temperature: -45°C to +85°C
Cavity comply with FCC Rules and Regulations
Part 68, Subpart F

E-tec 2016 © - all rights reserved



UNIT	mm	GENERAL TOLERANCE		DRAWN	DATE	DWG. NO.	SHEET 1/1
SCALE	Free	.X° ±	.X ±	RH	06.12.2006	4341500	REV. C
		.XX° ±	.XX ± 0.25	Ronny	20.12.2016	SERIES NO.	
		.XXX° ±	.XXX ±	Hogi	20.12.2016	MJS-3U88-S0L0-9x/ExCS	

RJ45 / USB Combo Type with LED

1 x RJ45 <8P/8C>
2 x USB "A" 1.x
fully shielded