



**DOUBLE ROW**

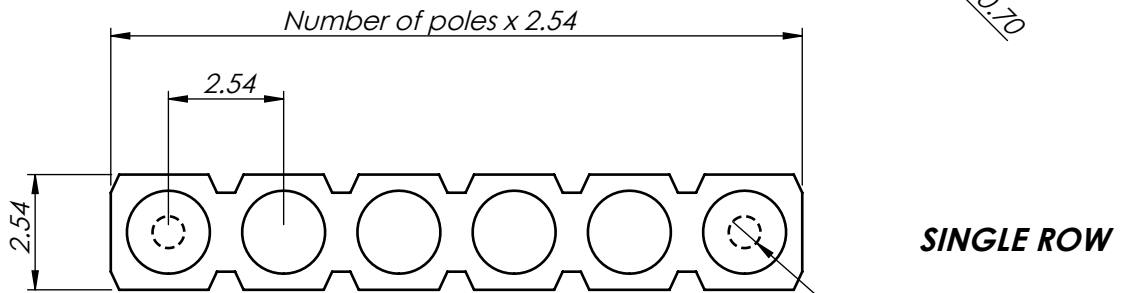

**SINGLE ROW**

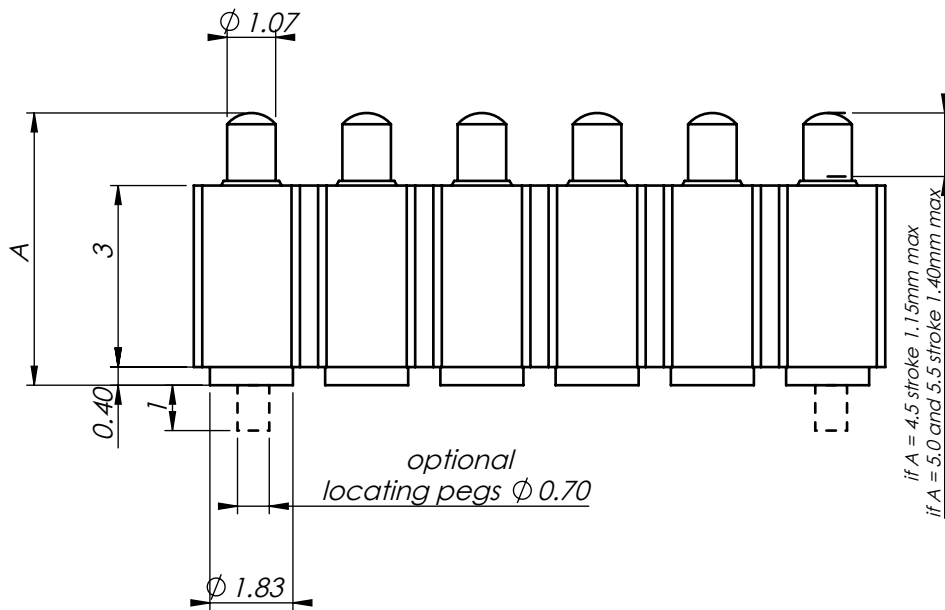

if A = 4.5 stroke 1.15mm max  
if A = 5.0 and 5.5 stroke 1.40mm max

Insulator Flammability: UL 94V-0  
Piston and barrel: Brass  
Spring: Stainless Steel  
Spring force : 0.25 N to 0.85 N  
Contact life: 100'000 cycles  
Current rating: 3.5 A  
Contact resistance: 15 mΩ  
Plating: Barrel and piston 0.5 μm gold

**A4V** Scale 6:1

UNLESS OTHERWISE SPECIFIED:  
DIMENSIONS ARE IN MILLIMETERS  
GENERAL TOLERANCES ISO 2768m



Remark:

The information contained in this drawing is proprietary to E-tec and shall not be reproduced or disclosed in whole or in part or used for any design or manufacture except where such user possesses direct, written authorization from E-tec

REV	0	modif:	
NAME	sme	DATE	09.11.2014
DRAWN	sme	DATE	09.11.2014
REV'D	-		
CHK'D	-		
APPV'D	sme	DATE	09.11.2014

"E-tec order code" **PSS-XXX-H3XX-67(X)**

1 = single row	Number of poles	45 A = 4.5mm	ommit
2 = dual row	Single row : 2 to 10	50 A = 5.0mm	L = locating pegs
	Dual row 4 to 20	55 A = 5.5mm	

**www.e-tec.com**