



**DOUBLE ROW**

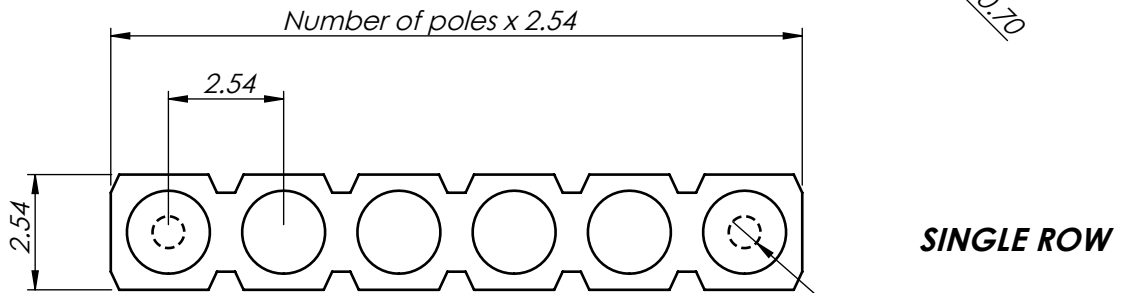

**SINGLE ROW**

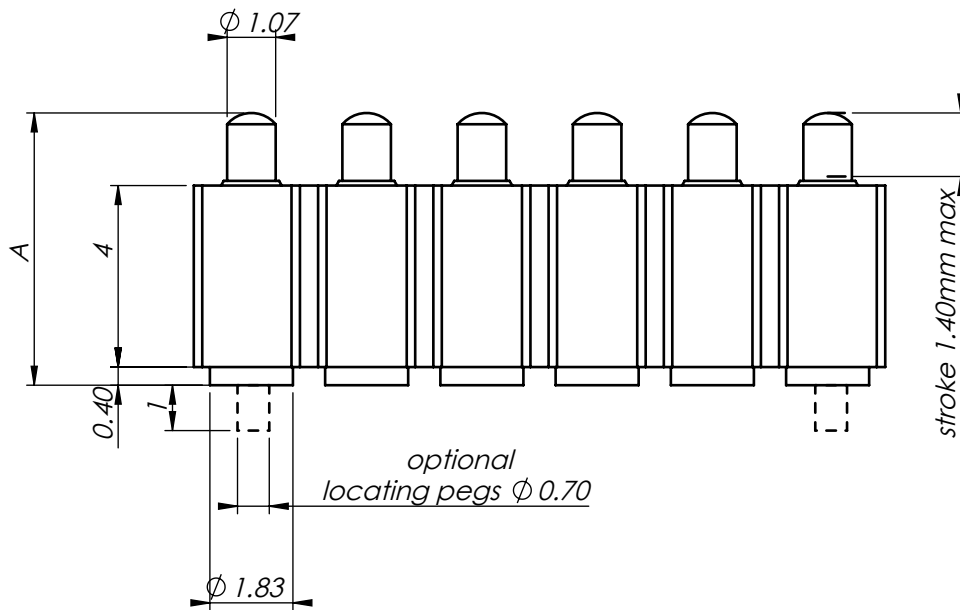

Insulator Flammability: UL 94V-0  
 Piston and barrel: Brass  
 Spring: Stainless Steel  
 Spring force : 0.25 N to 0.85 N  
 Contact life: 100'000 cycles  
 Current rating: 3.5 A  
 Contact resistance: 15 mΩ  
 Plating: Barrel and piston 0.5 μm gold

**A4V** Scale 6:1

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MILLIMETERS  
 GENERAL TOLERANCES ISO 2768m



Remark:

The information contained in this drawing is proprietary to E-tec and shall not be reproduced or disclosed in whole or in part or used for any design or manufacture except where such user possesses direct, written authorization from E-tec

REV	0	modif:
NAME	sme	DATE
DRAWN	sme	09.11.2014
REV'D	-	-
CHK'D	-	-
APPV'D	sme	09.11.2014

"E-tec order code" **PSS-XXX-H4XX-67(X)**

1 = single row	Number of poles	60 A = 6.0mm	ommit
2 = dual row	Single row : 2 to 10	65 A = 6.5mm	L = locating pegs
	Dual row 4 to 20	70 A = 7.0mm	
		75 A = 7.5mm	

**www.e-tec.com**